


# Add the convenience of wireless operator control to your DeviceNet™ system using a NetComm base unit and a TriggerPad hand station.

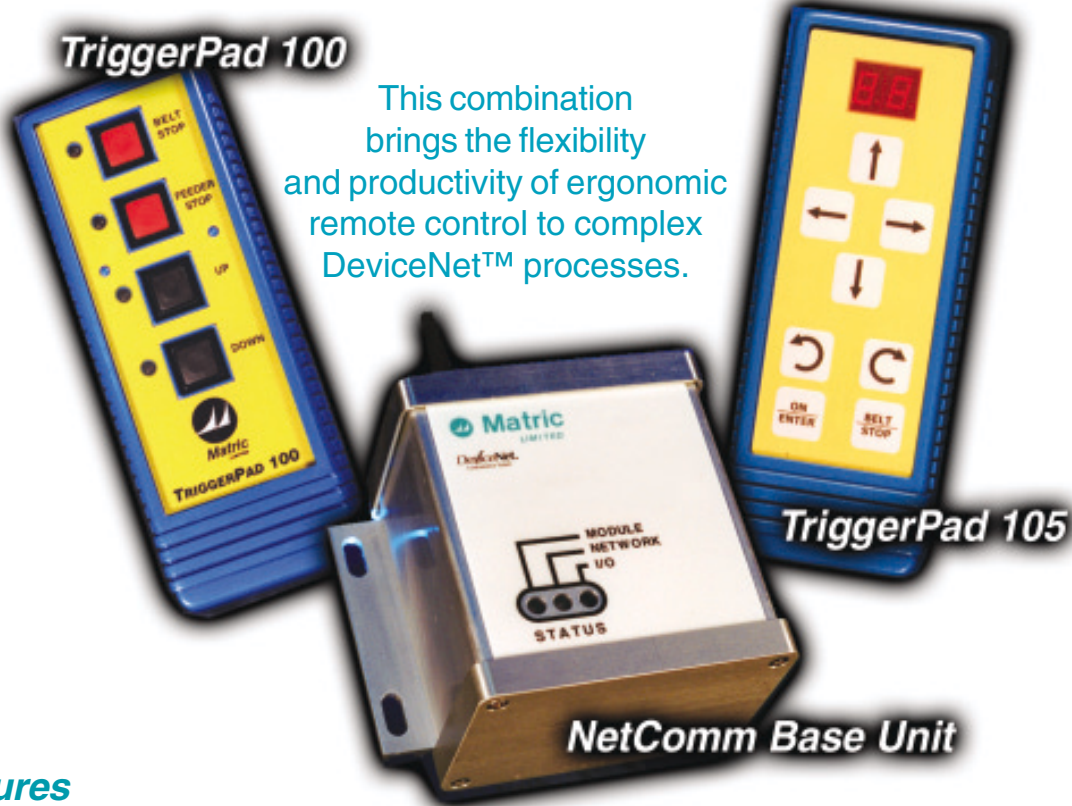


This combination brings the flexibility and productivity of ergonomic remote control to complex DeviceNet™ processes.

## Features

- Sealed enclosures
- 900MHz one way radio with 8 channels (license free)
- CRC data error checking
- TriggerPad power: 3 AA batteries (32 hours continuous operation)
- NetComm power: 11-24VDC +/- 5% (DeviceNet™)
- Range of 300 feet typical
- Operational temperature range of 0°C to +70°C
- Storage temperature range of -40°C to +85°C
- 1 million cycle sealed mechanical tactile pushbuttons
- Eight button membrane switch available with 2 digit display
- Custom switchpads available with up to 12 switches
- 125K, 250K & 500K DeviceNet™ baud rates
- In range / Out of range indicator for site mapping
- Standard DeviceNet™ indicators on NetComm
- Low battery indicator on TriggerPad
- NetComm dimensions: 5.25" X 5.75" X 3", 1 lb. 10 oz.
- TriggerPad dimensions: 2.75" X 1.375" X 7", 12.5 oz.
- 30 ft. NetComm antenna cable available

**DeviceNet™**  
CONFORMANCE TESTED

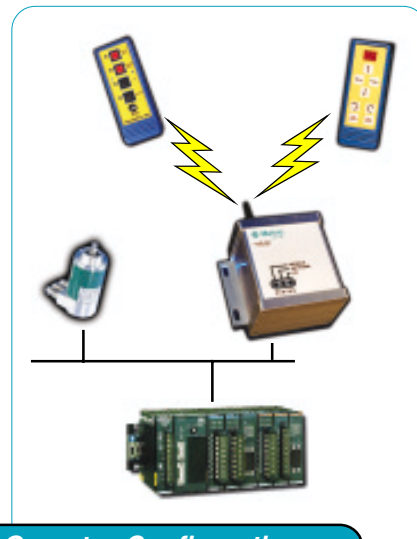

2099 Hill City Road • Seneca, Pennsylvania 16346 USA  
Phone: 814-677-0716 • Toll Free: 800-462-8742  
FAX: 814-678-1301 • EMail: sales@matric.com • [www.matric.com](http://www.matric.com)

Multi-Channel / Multi-Operator Configurations